



## **MSLC-2™ Master Synchronizer and Load Control**

### **DESCRIPTION**

The Woodward MSLC-2™ is a microprocessor based load control designed for three-phase electric power generation sites equipped with Woodward DSLC-2™ Digital Synchronizer and Load Controls. The original MSLC™ has been blended with another decade of application experiences to develop the new MSLC-2™. The MSLC-2™ is a synchronizer, a utility load sensor, an import/export load level control, a power factor control, and a master process control. Applications include power systems which operate in parallel with the utility with single or multiple utility feeds as well as new capabilities for multiple segment and intertie breaker control.

For utility parallel systems, the MSLC-2™ provides either phase matching or slip frequency automatic synchronizing of the local plant bus to the main power grid through one or several main breakers. The MSLC-2's™ load sensor and load control sense true RMS power and provide bumpless loading and unloading against the power grid. Plant voltage is matched to the utility prior to paralleling. Operating modes can either be base load or import/export/process power levels against the utility. Power factor or VAR levels are precisely controlled. The MSLC-2™ communicates via Ethernet to control real and reactive loading against the utility by DSLC-2™ equipped generators. 32 generators equipped with DSLC-2's™ can be paralleled to the utility with up to eight individual bus segments. Intertie breakers are controlled, and synchronized through individual MSLC-2's™ actively communicating with the individual DSLC-2's™ and the other MSLC-2's™ on the system.

For isolated multiple generator systems, the MSLC-2™ can be used to operate tie breakers between groups of generators using the DSLC-2™ controls.

### **FEATURES**

- One MSLC-2™ can provide master control for up to 32 DSLC™ and an additional 15 MSLC-2™ in a system.
- Dedicated Ethernet line for precise system communications between all DSLC-2's™ and MSLC-2's™ on the system.
- Ethernet Modbus TCP for remote control and monitoring by PLC or DCS system.
- Master MSLC-2™ redundancy. Loss of communications with the designated MSLC-2™ master initiates token passing to the next designated MSLC-2™ master.
- One part number (8440-1877) is adjustable for multiple applications.
- Slip frequency or voltage phase matching synchronizing fully selectable with dead bus option in both directions provide full flexibility for intertie and main-tie-main applications.
- Designing complex systems with multiple utility and segment interties is simplified using the DSLC-2™ and MSLC-2™ controls.
- Having functions integrated into one box eliminates the need for redundant sensors (like PTs, CTs, and MOPs) that connect to individual modules such as the load sensor and synchronizer.
- Digital signal processing makes the MSLC-2™ resistant to power line distortions and harmonics.
- Three-phase true RMS power sensing provides accurate readings even with unbalanced phase loading and voltage fluctuations.
- Export/import control over multiple utility MSLC-2's in same segment.
- The Woodward ToolKit™ software allows flexible setup using the same basic menu tree as the original MSLC™ plus an overview screen. No hand held programmer is required. Graphical overview of generators and bus bar parameters with trending makes the MSLC-2™ commissioning friendly.

- Ethernet communication for information exchange between max. 32 DSLC-2™ and 16 MSLC-2™ controls
- PLC and DCS Compatible via Modbus RTU or Modbus TCP
- Automatic segment recognition
- Supports and communicates up to 8 bus segments
- Automatic plant loading and unloading for bumpless load transfer to and from the utility
- Controls plant wide import/export levels against the utility
- Overall plant Power Factor control
- Not compatible with original MSLC™
- UL/cUL & CE Listed


# SPECIFICATIONS

Power supply	12/24 Vdc (8 to 40 Vdc)
Intrinsic consumption	max. 15 W
Ambient temperature (operation)	-40°C to 70°C / -40 to 158°F
Ambient temperature (storage)	-40°C to 85°C / -40 to 185°F
Ambient humidity	95 %, non-condensing
<b>Voltage</b>	( $\sqrt{\Delta}$ )
120 Vac [1] Rated ( $V_{rated}$ )	69/120 Vac
Max. value ( $V_{max}$ )	86/150 Vac
Rated voltage phase - ground	150 Vac
Rated surge volt. ( $V_{surge}$ )	2.5 kV
<b>and</b> 480 Vac [4] Rated ( $V_{rated}$ )	277/480 Vac
Max. value ( $V_{max}$ )	346/600 Vac
Rated voltage phase - ground	300 Vac
Rated surge volt. ( $V_{surge}$ )	4.0 kV
Accuracy	Class 0.5
Measurable alternator windings	3p-3w, 3p-4w, 3p-4w OD
Setting range	primary 50 to 650,000 Vac
Linear measuring range	1.25 $\times V_{rated}$
Measuring frequency	50/60 Hz (40 to 85 Hz)
High Impedance Input; Resistance per path	[1] 0.498 M $\Omega$ , [4] 2.0 M $\Omega$
Max. power consumption per path	< 0.15 W
<b>Current (Isolated)</b> Rated ( $I_{rated}$ )	[1] ..1 A or [5] ..15 A
Linear measuring range	$I_{gen} = 3.0 \times I_{rated}$
	$I_{mains/ground} = 1.5 \times I_{rated}$
Setting range	1 to 32,000 A
Burden	< 0.15 VA
Rated short-time current (1 s)	[1] 50 $\times I_{rated}$ , [5] 10 $\times I_{rated}$
Accuracy	Class 0.5


<b>Power</b>	0.5 to 99,999.9 kW/kvar
Setting range	0.5 to 99,999.9 kW/kvar
<b>Discrete inputs</b>	isolated
Input range	12/24 Vdc (8 to 40 Vdc)
Input resistance	approx. 20 kOhms
<b>Relay outputs</b>	potential free
Contact material	AgCdO
Load (GP)	2.00 Aac@250 Vac
	2.00 Adc@24 Vdc / 0.36 Adc@125 Vdc / 0.18 Adc@250 Vdc
Pilot duty (PD)	1.00 Adc@24 Vdc / 0.22 Adc@125 Vdc / 0.10 Adc@250 Vdc
<b>Analog inputs (none isolated)</b>	freely scaleable
Type	0 to 10 V / 0 to 20 mA
Resolution	11 Bit
<b>Housing</b>	Switch cabinet back mounting
Dimensions	WxHxD .....250 x 227 x 84 mm (9.84 x 9.00 x 3.30 in)
Connection	screw/plug terminals 2.5 mm <sup>2</sup>
Protection system	IP 20
Weight	approx. 1,900 g (4.2 lbs)
<b>Disturbance test (CE)</b>	tested according to applicable EN guidelines
<b>Listings</b>	UL, cUL, GOST-R, CSA
<b>Marine</b>	LR (Type Approval), ABS (Design Assessment)

# DIMENSIONS

## Sheet metal housing for cabinet mounting

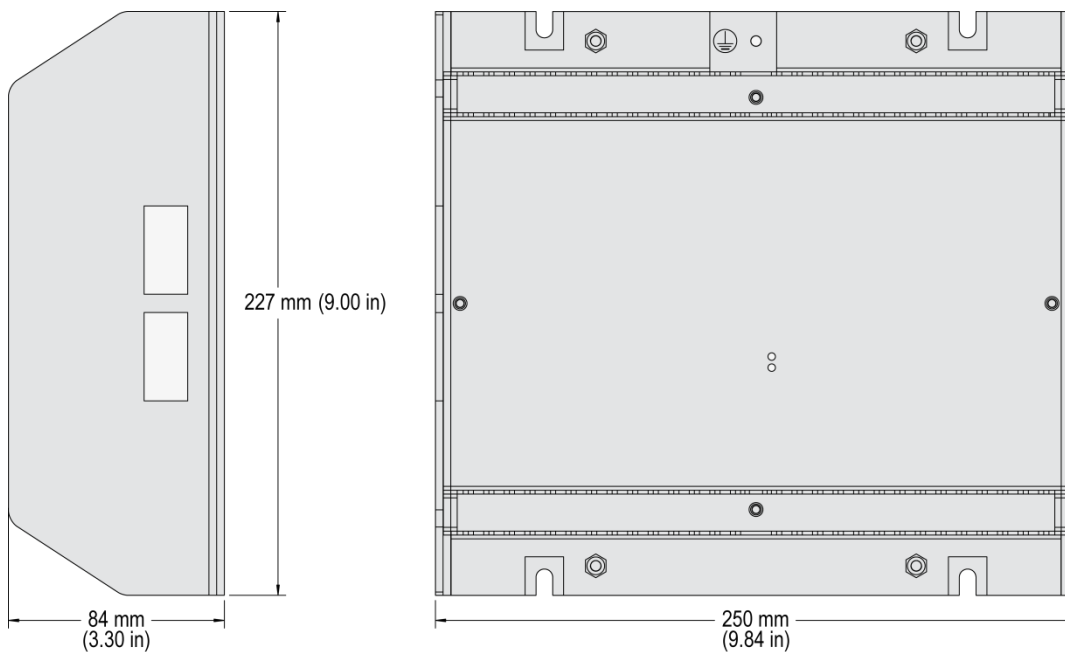


# TERMINAL DIAGRAM

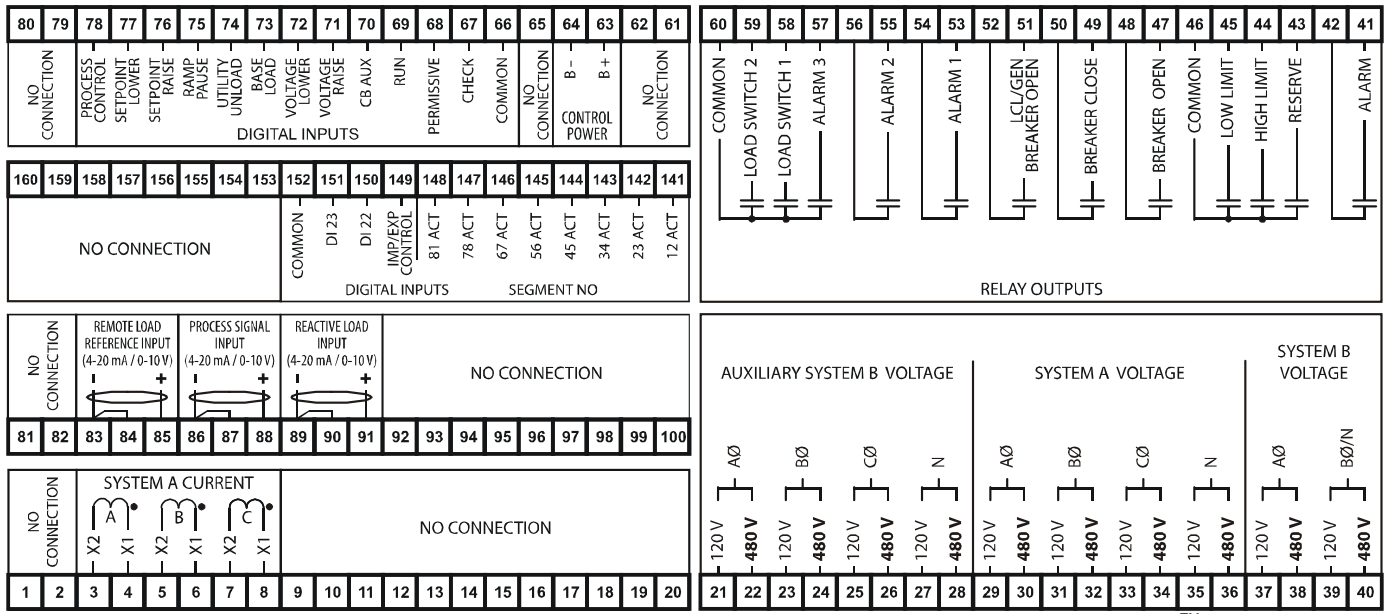

MSLC-2™ – terminal diagram

# TYPICAL CONFIGURATION

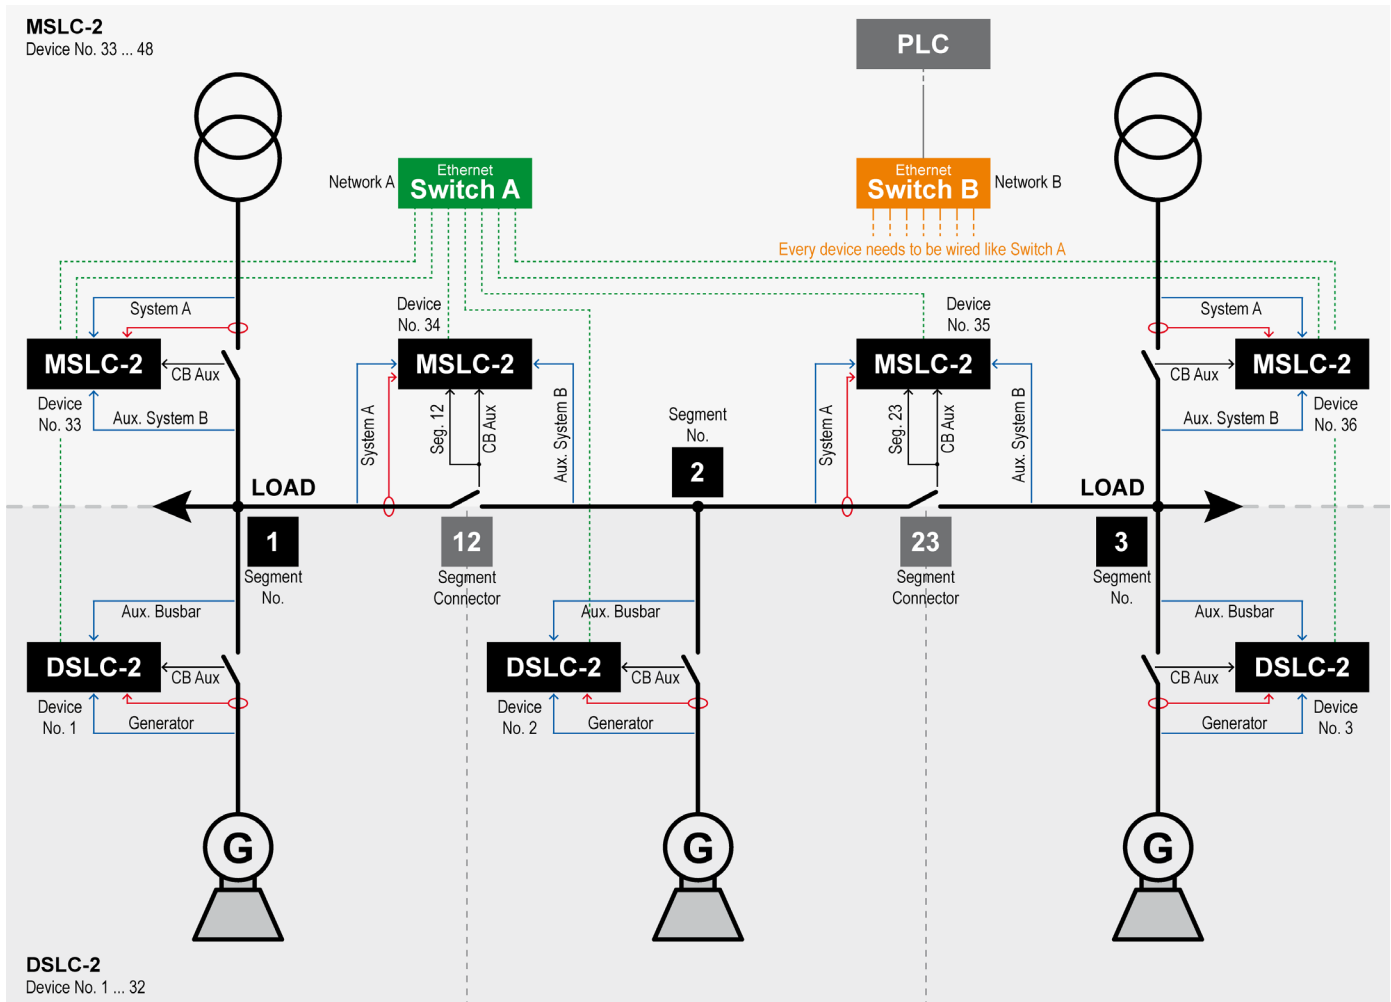

Configuration of a typical application using DSLC-2™ and MSLC-2™ devices in combination

**International**  
 Woodward  
 PO Box 1519  
 Fort Collins CO, USA  
 80522-1519  
 1000 East Drake Road  
 Fort Collins CO 80525  
 Ph: +1 (970) 482-5811  
 Fax: +1 (970) 498-3058

**Europe**  
 Woodward GmbH  
 Handwerkstrasse 29  
 70565 Stuttgart, Germany  
 Ph: +49 (0) 711 789 54-0  
 Fax: +49 (0) 711 789 54-100  
 email: stgt-info@woodward.com

**Distributors & Service**  
 Woodward has an international network of distributors and service facilities. For your nearest representative, call the Fort Collins plant or see the Worldwide Directory on our website.

[www.woodward.com/power](http://www.woodward.com/power)

For more information contact:

Subject to technical modifications.

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Governor Company contractual or warranty obligation unless expressly stated in a written sales contract.

We appreciate your comments about the content of our publications. Please send comments including the document number below to [stgt-doc@woodward.com](mailto:stgt-doc@woodward.com)

© Woodward


**All Rights Reserved**

37494B - 2011/03/Stuttgart

# TOOLKIT CONFIGURATION SOFTWARE

Woodward's ToolKit Software provides the MSLC-2™ Home Page shown below. ToolKit provides user friendly configuration, commissioning assistance, displays all operating modes, and the overview pages show what other controls the MSLC-2™ is communicating with.

**Note:** The menu tree illustrated on the left side is similar to the original MSLC™ structure.

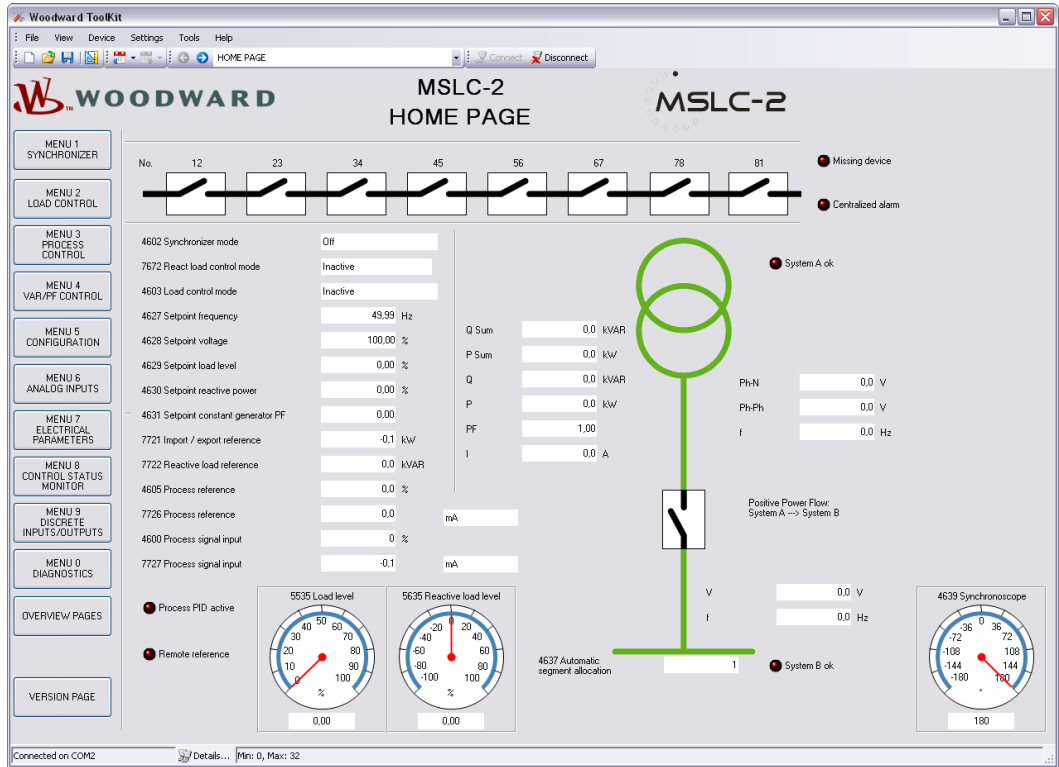

## FEATURES OVERVIEW

	MSLC-2	DSLCL-2
<b>I/Os</b>		
Discrete inputs	23	23
Relay outputs	12	12
Analog inputs	3	3
Analog outputs	-	2
RS-232 Interface	1	1
RS-485 Interface	1	1
Ethernet Interfaces (10/100 Mbit/s)	2	2
LED 1	CPU OK	CPU OK
LED 2	Sync Enable	Sync Enable
<b>Listings/Approvals</b>		
UL / cUL Listing	✓	✓
GOST-R & CSA	✓	✓
LR & ABS Marine	✓	✓
CE Marked	✓	✓

## PART NUMBERS

MSLC-2		DSLCL-2	
1A CT inputs	5A CT inputs	1A CT inputs	5A CT inputs
P/N 8440-1977	P/N 8440-1877	P/N 8440-1978	P/N 8440-1878
<b>Accessories</b>			
Spare connector kit - P/N 8923-1314			